

RCBO EKL9-40 6kA




RCCB with Overcurrent Protection

Standard_ IEC61009-1



Overall and Installation Dimension(mm)

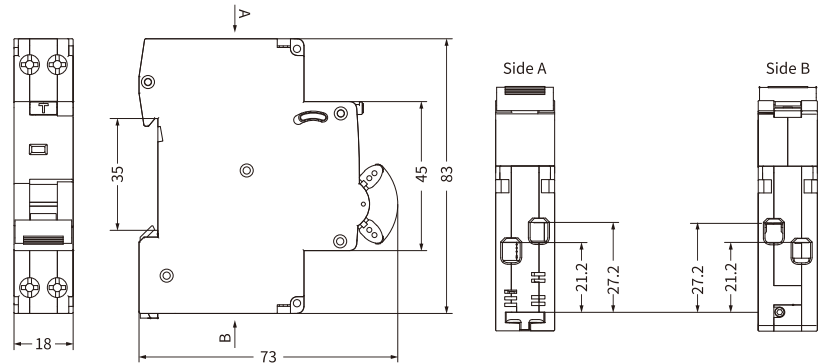

Technical Data

Standard	IEC/EN61009-1
Protection	Ground fault, Overcurrent and short circuit
Type of trip	Ground fault : Electronic Overload and short circuit :Thermo-magnetic
Type of protection (electric leakage)	AC,A
No.of poles	1P+N 1module , N line with disconnected
Rated currents (In)	6,10,16,20,25,32,40A
Rated sensitivity currents I Δ n	10,30,100,300mA
Residual current off-time under I Δ n	≤ 0.1s
Reted residual making and breaking capacity(I Δ m)	500A(In≤50A), 10In(In>50A)
Rated voltage (Ue)	230/240V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A
Energy Limiting Class	3
Rated impulse withstand voltage(1.5/50) U imp	4,000V
Dielectric test voltage at Ind. Freq.for 1 min	2kV
Thermal release characteristic	(1.13-1.45) x In
Magnetic release characteristic	B:(3-5) x In, C:(5-10) x In
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles
Contact position indicator	Yes
Protection degree	IP20
Ambient temperature	-25°C to +40°C, Max.95% humidity
Terminal connection type	Cable/Pin-type busbar
Max.terminal size for cable	16mm ²
Max.tightening torque	2.5N.m
Installation	Mounting on 35mm DIN rail
Connection	From top and bottom