


IOT SMART DEVICES

- Smart Circuit Breakers
- Auto Reclosers
- Smart Relay Switches

» *Always for your safety*

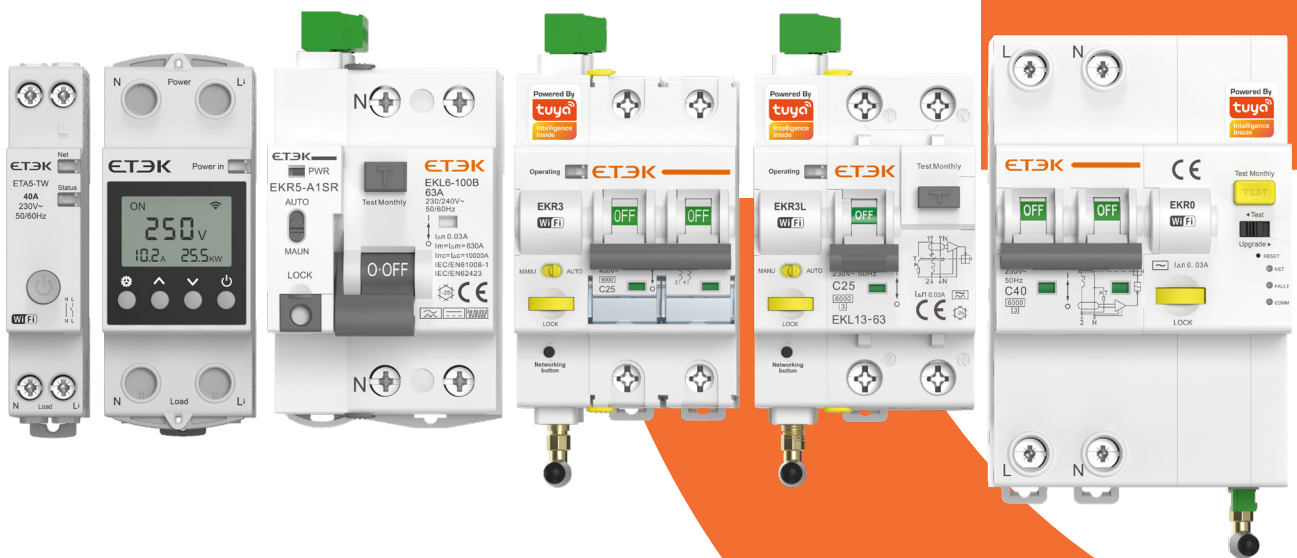

Always for your safety



COMPANY INTRODUCTION

Zhejiang ETEK Electrical Technology Co., Ltd. (Abbreviation: ETEK Electric) is a professional manufacturing company dedicated to the research, development, production, and sales of low-voltage electrical appliances. The company was established in 2011 and is located in Wenzhou City, Zhejiang Province. At present, the company has 40K sqm of modern manufacturing bases in Wenzhou and Wuhu with over 500 employees, including over 50 R&D and technical personnel.

ETEK Electric has multiple production workshops for mold design, parts manufacturing, welding, and assembly. Additionally, they have multiple automated production lines for MCB and RCCB. Our products include MCB, RCCB, RCBO, AFDD, MCCB, ACB, EV Chargers, Photovoltaic DC products, etc., which can meet the needs of different countries and are widely used in fields such as residential, commercial, and industrial.

ETEK Electric has built our own low-voltage electrical testing center, and most of the testing items can meet the requirements of international IEC standards. The company has obtained ISO9001, ISO14001, and ISO45001 system certifications as well as products have obtained international CB, TUV, VDE, CE, RoHS, and other quality certificates.

ETEK Electric constantly masters and breaks through the core technology of circuit breakers, with more than 100 national patents. Focusing on independent brand construction is crucial for the company's development. The "ETEK" trademark is registered in over 80 countries. Products are exported to over 100 countries and regions including the European Union, South America, the Middle East, Africa, and Southeast Asia.

We also support OEM, ODM, OBM, SKD, CKD and other business cooperation models, and provide customers with a full range of services covering market cultivation, technical training, and factory construction.

ETEK Electric has been adhering to the business policy of "Growth", "Quality", "Efficiency", and "Innovation". In 2023, ETEK Electric has formulated the fifth 3-year strategic plan, which specifies the three major initiatives of expanding the production scale, enhancing the new energy market share, and expanding the independent brand, to realize the annual revenue target of \$50 million by 2026.


Looking forward to the future, ETEK Electric will be committed to becoming a globally renowned manufacturer in the power distribution and electrical industry, safeguarding the power safety of global customers, and helping the development of green and digital energy.



WORKSHOPS



OEM & ODM BUSINESS

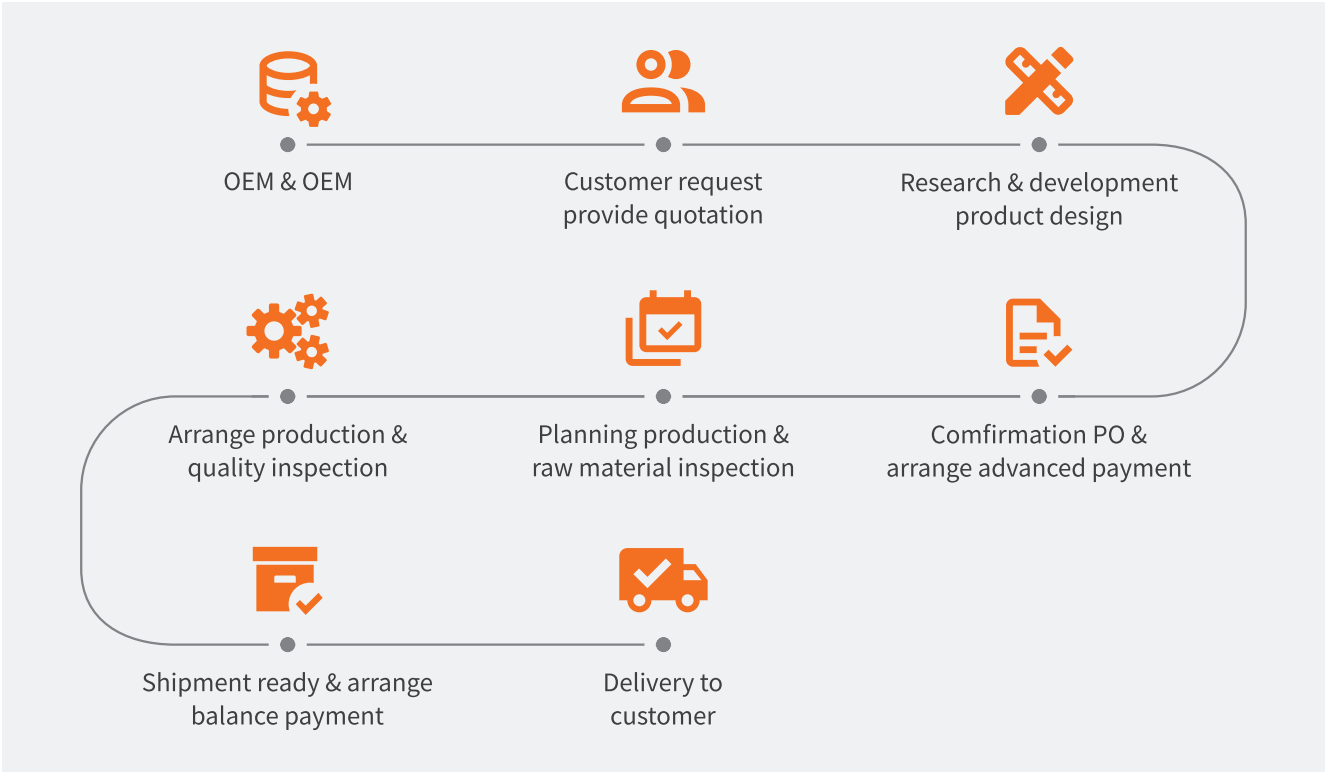

CONTENTS

| | |
|--|----|
| Smart Circuit Breaker Overview | 01 |
| EKR3 Series Smart MCB | 03 |
| EKR3L Series Smart RCBO | 06 |
| EKR3S Series Smart MCB | 09 |
| EKR0 Series Smart RCBO | 12 |
| EKR5 Series Recloser for RCCB | 15 |
| EKA1 Series Smart Relay Switch | 19 |
| EKA3 Series Smart Relay Switch | 21 |
| EKA5 Series Smart Relay Switch with Metering | 23 |

SMART CIRCUIT BREAKERS

Smart circuit breaker is an electronic device that operates the circuit breaker to open or close, monitor and collect the usage status of the circuit and the load device through the remote control. The smart circuit breaker can feedback and record the information status of circuits and equipment in real time through the Internet.

It can be remotely controlled using multiple protocols, such as RS485, WiFi, etc. At the same time, collect some data in the device circuit, so that we can use the device in a more reasonable combination, so as to improve the effectiveness of power supply.



Application


It can be widely used in power grid terminal lines, unattended mobile phone base stations, elevators, air conditioners, smart phones, smart homes, smart factories, new energy vehicle charging piles, etc.




Difference between EKR3, EKR3S, EKR3L, EKR0

| Ref No. | EKR3 | EKR3S | EKR3L | EKR0 |
|---|--------------------------------|--|--------------------|--|
| Picture | | | | |
| No. of poles | 1P, 2P, 3P, 4P | 1P, 2P, 3P, 4P | 1P+N | 1P+N, 3P, 3P+N |
| Rated voltage (U _e) | 240V (1P, 2P) 415V (3P, 4P) | 230/240V (1P, 2P) 380/400V (3P, 4P) | 230/240V | 230/240V (1P+N) 400/415V (3P, 3P+N) |
| Rated currents (I _n) | 10-63A | 10-100A | 10-63A | 16-63A |
| Rated breaking capacity | 6kA | 6kA | 6kA, 10kA | 6kA, 10kA |
| Rated sensitivity currents (I _{Δn}) | - | - | 10, 30, 100, 300mA | 10, 30, 100, 300mA |
| Remote control | ● | ● | ● | ● |
| Padlocker | ● | ● | ● | ● |
| Timed task | ● | ● | ● | ● |
| Automatic reclosing | / | / | ○ | / |
| Power metering | / | ● | / | ● |
| Fault feedback | ● | ● | ● | ● |
| Overvoltage protection | / | ● | / | ● |
| Undervoltage protection | / | ● | / | ● |
| Over-current protection | / | ● | / | ● |
| Overload protection | ● | ● | ● | ● |
| Leakage protection | / | / | ● | ● |
| Leakage detection | / | / | / | ● |
| Over temperature protection | / | ● | / | ● |
| Short circuit protection | ● | ● | ● | ● |
| Data monitoring | ● | ● | ● | ● |
| Power limit | / | ● | / | ● |
| Fault record | ● | ● | ● | ● |

Note: ● Standard ○ Optional / None

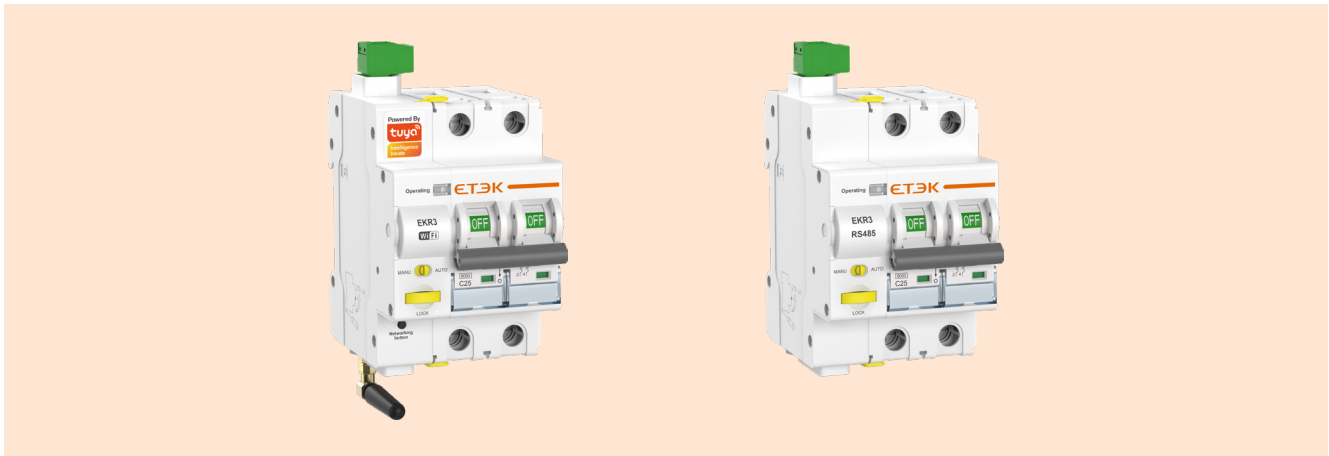


Overview

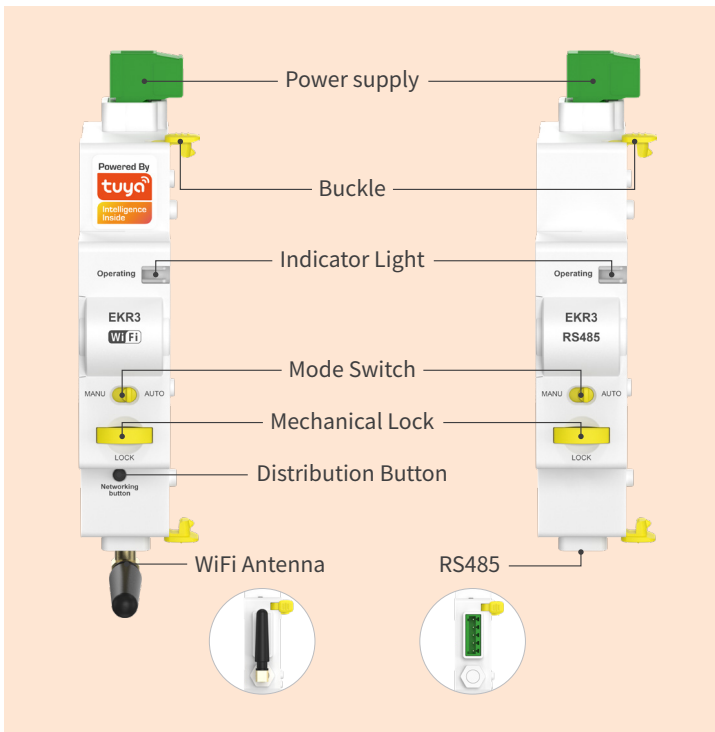

EKR3 smart MCB provides not only overload and short-circuit protection like traditional circuit breakers, but also the ability to remotely control the closing and timing of the MCB through the Tuya APP or RS485 platform, as well as obtain the switch status of the device.

EKR3 smart MCB is an ideal choice for smart home and industrial automation systems, offering circuit protection, remote control, and monitoring capabilities to improve energy management efficiency, enhance power safety, and provide users with more control options.



Application



Smart home systems, which can be integrated into the overall home automation solution.



Commercial buildings, which can achieve centralized energy management.



Industrial facilities, which can remotely monitor and control individual circuits.



Locations where electricity consumption requires regular control, such as billboard lighting and public area lighting.

EKR3 Series

Smart MCB

ETEK®

Features

Traditional Protection

- Overload protection
- Short-circuit protection

Advanced Functionalities

- Remote closing and timing control of the circuit breaker
- Real-time switch status monitoring

Mechanical Padlock

When the mechanical lock is pulled out, the switch enters a locked state, preventing the switch from being turned on. To restore the device, press down the mechanical lock.


Multiple Communication Methods

- WiFi (Tuya)
- RS485
- ZigBee (Tuya)
- Dry Contact

Automatic, Manual Mode

- Automatic mode allow remote control (Tuya APP, RS485).
- Manual Mode, only supports local manual operation

Instruction of Type Code

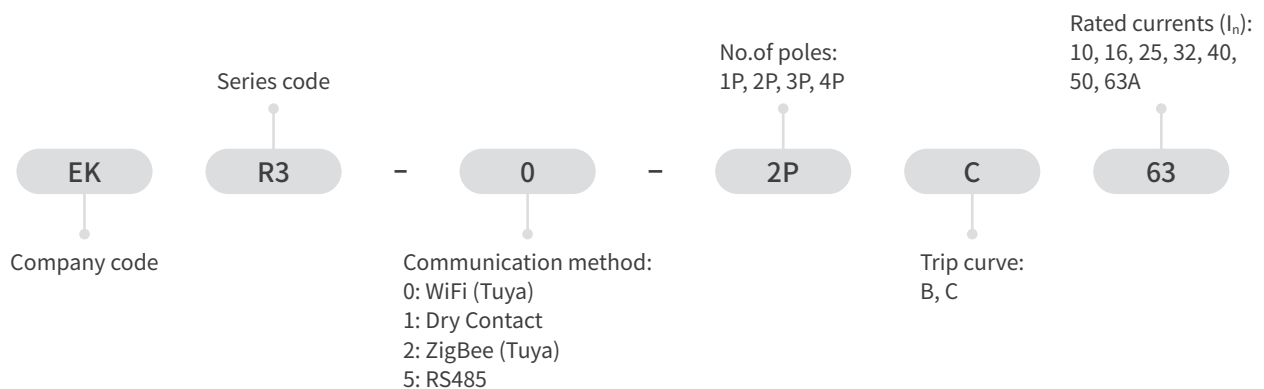


Technical Parameter

| | |
|--|--|
| No. of poles | 1P, 2P, 3P, 4P |
| Supply terminal | L-N (It is advisable to draw power from the incoming line) |
| Power supply voltage | 220/230V |
| Standby power consumption | < 3W |
| Status indicator | LED |
| Rated voltage (U_e) | 240V (1P, 2P), 415V (3P, 4P) |
| Rated currents (I_n) | 10, 16, 25, 32, 40, 50, 63A |
| Rated frequency | 50/60Hz |
| Rated short-circuit capacity (I_{cn}) | 6kA |
| Energy limiting class | 3 |
| Rated impulse withstand voltage (U_{imp}) (1.2/50 μ s) | 4kV |
| Dielectric test voltage | 2kV (50/60Hz, 1 min.) |
| Trip curve | B: (3-5) $\times I_n$, C: (5-10) $\times I_n$ |
| Electrical life | 4000 Cycles |
| Mechanical life | 10000 Cycles |

| | |
|---|---|
| Trip time | ≤ 1s |
| Communication method | WiFi (Tuya), 2.4GHz; ZigBee (Tuya); Dry contact; RS485, Baud rate: 2400/ 4800/ 9600 (default) |
| Operational safety | Mechanical padlock, Ensure safety during onsite maintenance |
| Monitoring physical data | Real-time voltage, Switch wtate, Device operating status |
| Function description | Overload protection, Short circuit protection, Multiple timing, Remote control |
| Protection degree | IP20 |
| Ambient temperature | -5°C to +40°C (Current capacity is significantly reduced at 70°C) |
| Storage temperature | -25°C to +70°C |
| Max. Supply terminal size for cable | 2.5mm ² |
| Terminal connection type | Cable/Pin-type busbar |
| Max. conductor cross-sections for cable | 25mm ² |
| Altitude | ≤ 2000m |
| Installation | Mounting on 35mm DIN rail |
| Incoming method | From top |

Dimensions and Wiring Diagram

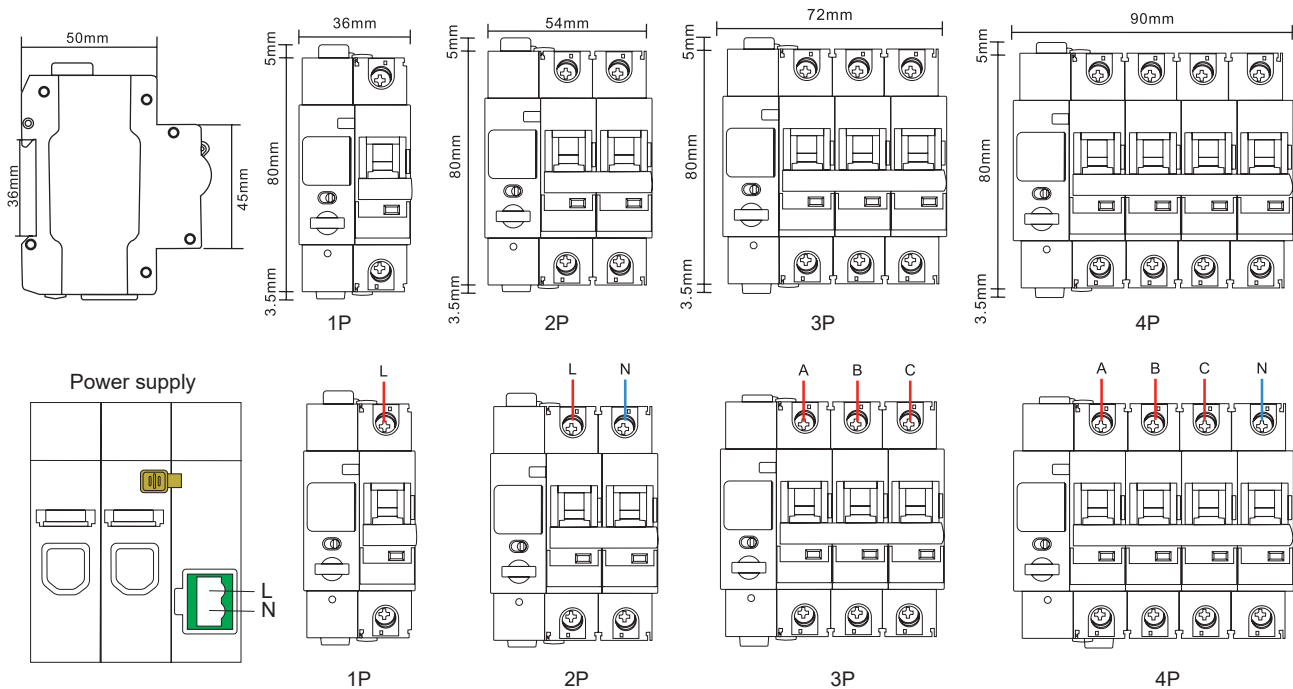


EKR3L Series

Smart RCBO

ETEK®



Overview

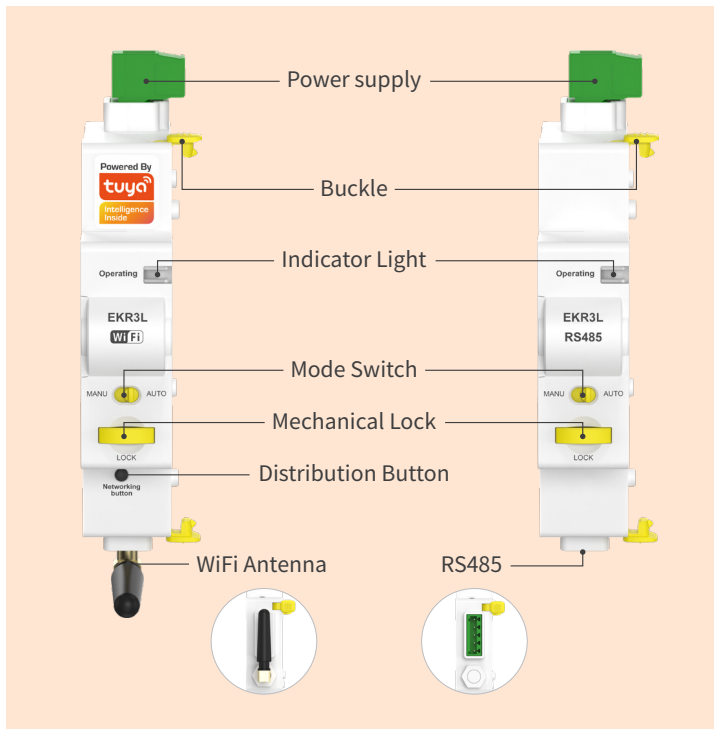

EKR3L smart RCBO offers not only overload, short-circuit, and leakage protection like traditional circuit breakers, but also the ability to be remotely controlled and monitored through the Tuya APP or RS485 platform. It also provides an automatic reclosing function to improve the reliability of the circuit power supply.

EKR3L Smart RCBO combines traditional RCBO protection features with modern smart home technology, providing users with enhanced safety, convenience, and control over their electrical systems. It is particularly useful for remote management of electrical circuits and can be integrated into broader smart homes or building automation systems.



Application



Smart home systems, which can be integrated into the overall home automation solution.



Commercial buildings, which can achieve centralized energy management.



Industrial facilities, which can remotely monitor and control individual circuits.



Locations where electricity consumption requires regular control, such as billboard lighting and public area lighting.

Features

Traditional Protection

- Overload protection
- Short-circuit protection
- Leakage protection (residual current)

Advanced Functions

- Remote opening and closing control
- Timing tasks (power on/off scheduling)
- Real-time switch status monitoring
- Optional built-in automatic reclosing function

Mechanical Padlock

When the mechanical lock is pulled out, the switch enters a locked state, preventing the switch from being turned on. To restore the device, press down the mechanical lock.

Smart Capabilities

- Remote control through Tuya APP or RS485 platform
- Wi-Fi, ZigBee, RS485, or Dry contact communication options
- Supported Apps: Tuya, Smart Life


Automatic, Manual Mode

- Automatic mode allow remote control (Tuya APP, RS485).
- Manual Mode, only supports local manual operation

Benefits

- Reduces manual maintenance costs
- Improves efficiency through remote control and monitoring
- Enhances circuit power supply reliability with automatic reclosing
- Integrates with smart home systems for improved automation

Instruction of Type Code

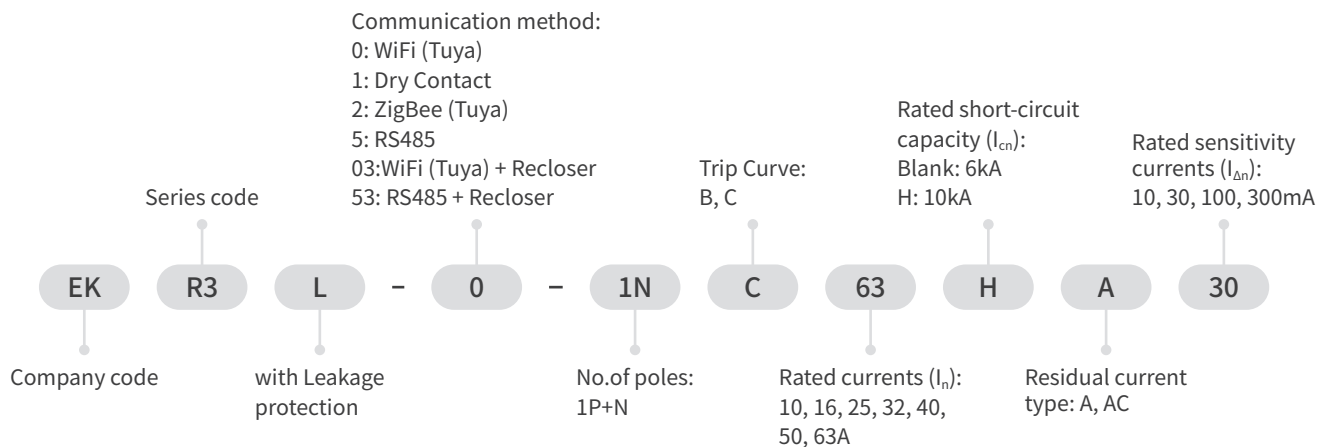

Technical Parameter

| | |
|---|--|
| Residual current type | A, AC |
| No. of poles | 1P+N (with switched neutral) |
| Supply terminal | L-N (It is advisable to draw power from the incoming line) |
| Power supply voltage | 220/230V |
| Standby power consumption | < 3W |
| Status indicator | LED |
| Rated voltage (U_e) | 230/ 240V |
| Rated frequency | 50/60Hz |
| Rated currents (I_n) | 10, 16, 25, 32, 40, 50, 63A |
| Rated sensitivity currents ($I_{\Delta n}$) | 10,30,100,300mA |
| Rated current off-time under ($I_{\Delta n}$) | $\leq 0.1S$ |


EKR3L Series

Smart RCBO

ETEK®


| | | | |
|--|----------------------|--|---|
| Rated residual making and breaking capacity ($I_{\Delta m}$) | | 500A ($I_n \leq 50A$), 10I _n ($I_n > 50A$) | |
| Rated short-circuit capacity (I_{cn}) | | 6kA, 10kA | |
| Energy limiting class | | 3 | |
| Rated impulse withstand voltage (U_{imp}) (1.2/50 μ s) | | 4kV | |
| Dielectric test voltage | | 2kV (50/60Hz, 1 min.) | |
| Trip curve | | B: (3-5) x I _n , C: (5-10) x I _n | |
| Trip time | | < 0.2s | |
| Electrical life | | 4000 Cycles | |
| Mechanical life | | 10000 Cycles | |
| Communication method | | WiFi (Tuya), 2.4GHz; ZigBee (Tuya); Dry contact; RS485, Baud rate: 2400/ 4800/ 9600 (default) | |
| Operational safety | | Mechanical padlock, Ensure safety during onsite maintenance | |
| Monitoring physical data | | Real-time voltage, Switch state, Device operating status | |
| Function description | | Overload protection, Short circuit protection, Leakage protection, Multiple timing, Remote control, Auto reclose | |
| Auto Reclose | Reclosing times | 3 times (WiFi-Tuya) | 5 times (RS485) |
| | Reclosing time | First time: 10 seconds; Second time: 60 seconds; Third time: 300 seconds; | First time: 60 seconds; Second time: 90 seconds; The third time: 1800 seconds; Fourth time: 2700 seconds; Fifth time: 3600 seconds; |
| | Reset reclosing time | No more tripping or manual reset within 15 minutes after successful closing. | No tripping or manual reset within 60 seconds after successful closing, Adjustable time setting range: 5-600 seconds. |
| Protection degree | | IP20 | |
| Ambient temperature | | -20°C to +55°C (Current capacity is significantly reduced at 70°C) | |
| Storage temperature | | -25°C to +70°C | |
| Max. supply terminal size for cable | | 2.5mm ² | |
| Terminal connection type | | Cable/Pin-type busbar/Fork-type busbar | |
| Max. conductor cross-sections for cable | | 25mm ² | |
| Altitude | | ≤ 2000m | |
| Installation | | Mounting on 35mm DIN rail | |
| Incoming method | | From top | |

Dimensions and Wiring Diagram

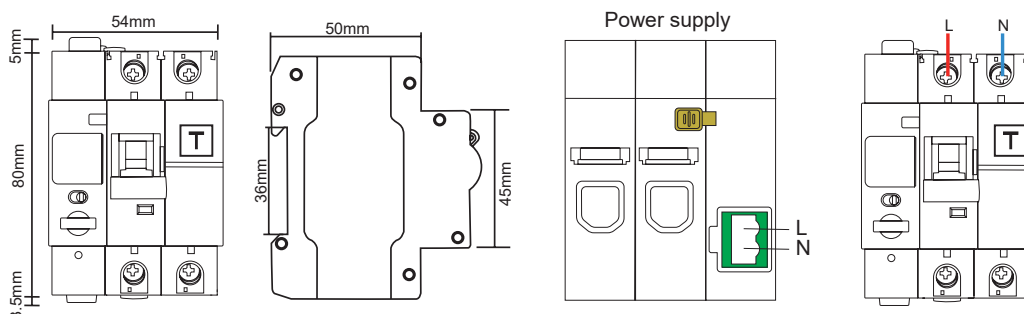



Overview

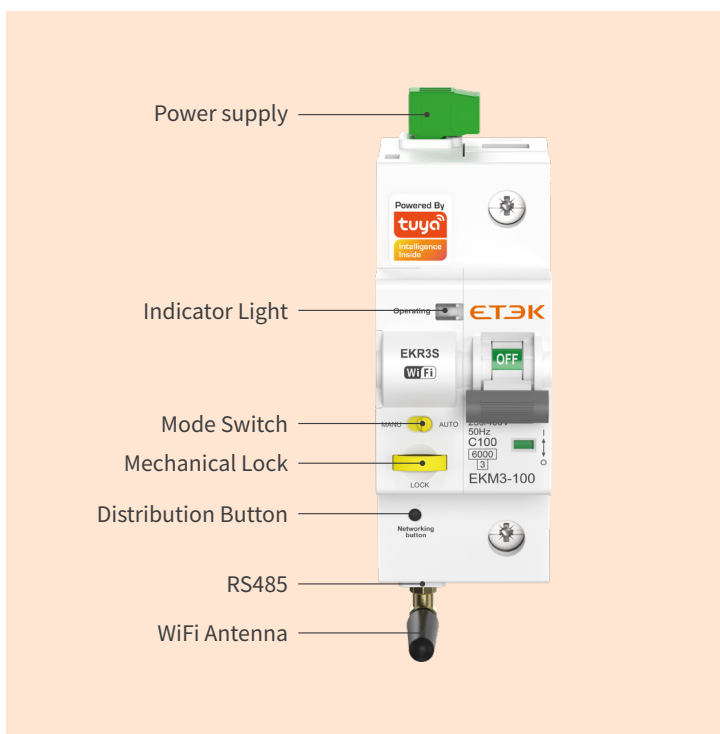


EKR3S Smart MCB offers overload and short-circuit protection for circuits up to 100A, and can also monitor various electrical parameters in real-time, with remote control capabilities through the Tuya APP or RS485 platform.

EKR3S smart MCB is an ideal choice for smart home and industrial automation systems, offering circuit protection, remote control, and monitoring capabilities to improve energy management efficiency, enhance power safety, and provide users with more control options.



Application



Smart home systems, which can be integrated into the overall home automation solution.



Commercial buildings, which can achieve centralized energy management.



Industrial facilities, which can remotely monitor and control individual circuits.



Locations where electricity consumption requires regular control, such as billboard lighting and public area lighting.

EKR3S Series

Smart MCB

ETEK®

Features

Traditional Protection

- Overload protection
- Short-circuit protection

Advanced Functions

- Remote opening and closing control
- Timing tasks (power on/off scheduling)
- Real-time switch status monitoring
- Electricity metering (only 1P&2P)

Mechanical Padlock

When the mechanical lock is pulled out, the switch enters a locked state, preventing the switch from being turned on. To restore the device, press down the mechanical lock.


Smart Capabilities

- Remote control through Tuya APP or RS485 platform
- Wi-Fi, ZigBee, RS485, or Dry contact communication options
- Supported Apps: Tuya, Smart Life

Automatic, Manual Mode

- Automatic mode allow remote control (Tuya APP, RS485).
- Manual Mode, only supports local manual operation

Instruction of Type Code

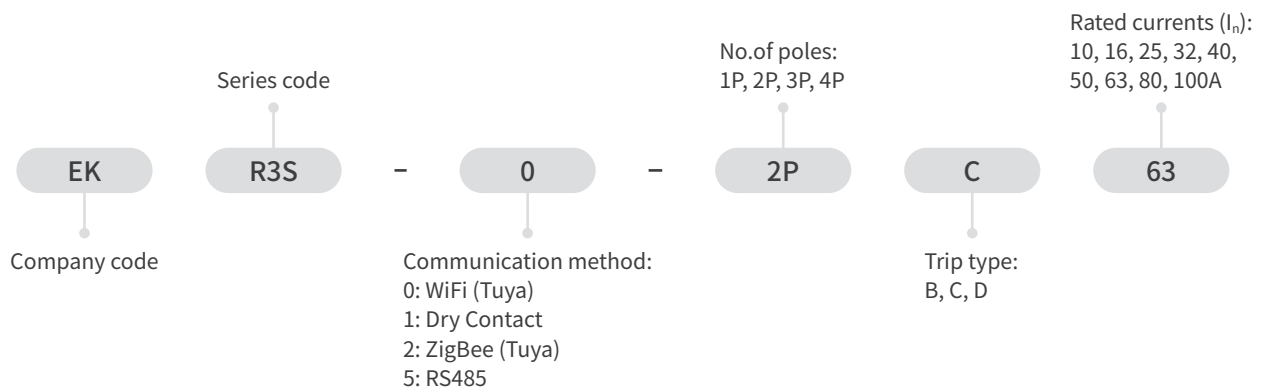


Technical Parameter


| | |
|--|--|
| Standard | IEC/EN 60898-1, IEC/EN 60947-2 |
| No. of poles | 1P, 2P (with metering); 3P, 4P (without metering) |
| Supply terminal | L-N (It is advisable to draw power from the incoming line) |
| Power supply voltage | 220/230V |
| Standby power consumption | < 5W |
| Status indicator | LED |
| Rated voltage (U _e) | 230/ 240V (1P, 2P), 380/400V(3P, 4P) |
| Rated frequency | 50/60Hz |
| Rated currents (I _n) | 10, 16, 25, 32, 40, 50, 63, 80, 100A |
| Rated short-circuit capacity (I _{cn}) | 6kA |
| Rated impulse withstand voltage (U _{imp}) (1.2/50μs) | 4kV |
| Dielectric test voltage | 2kV (50/60Hz, 1 min.) |
| Trip curve | B: (3-5) x I _n , C: (5-10) x I _n , D: (10-20) x I _n |

| | |
|---|---|
| Trip time | ≤ 1S |
| Electrical life | 4000 Cycles |
| Mechanical life | 10000 Cycles |
| Communication method | WiFi (Tuya), 2.4GHz; ZigBee (Tuya); Dry contact; RS485, Baud rate: 2400/ 4800/ 9600 (default) |
| Operational safety | Mechanical padlock, Ensure safety during onsite maintenance |
| Monitoring physical data | Real-time voltage, Real-time current, Real-time power, Temperature, Switch state, Device operating status |
| Function description | Overload protection, Short circuit protection, Over-temperature protection, Multiple timing, Remote control, Electricity metering |
| Characteristic set up | Over/under voltage action time, Over/under voltage value, Overcurrent value, Voltage imbalance value, Over power value, Phase loss value, Overtemperature value |
| Protection degree | IP20 |
| Ambient temperature | -5°C to +40°C (Current capacity is significantly reduced at 70°C) |
| Storage temperature | -25°C to +70°C |
| Max. Supply terminal size for cable | 2.5mm ² |
| Terminal connection type | Cable/Pin-type busbar |
| Max. conductor cross-sections for cable | 50mm ² |
| Altitude | ≤ 2000m |
| Installation | Mounting on 35mm DIN rail |
| Incoming method | From top |

Dimensions and Wiring Diagram

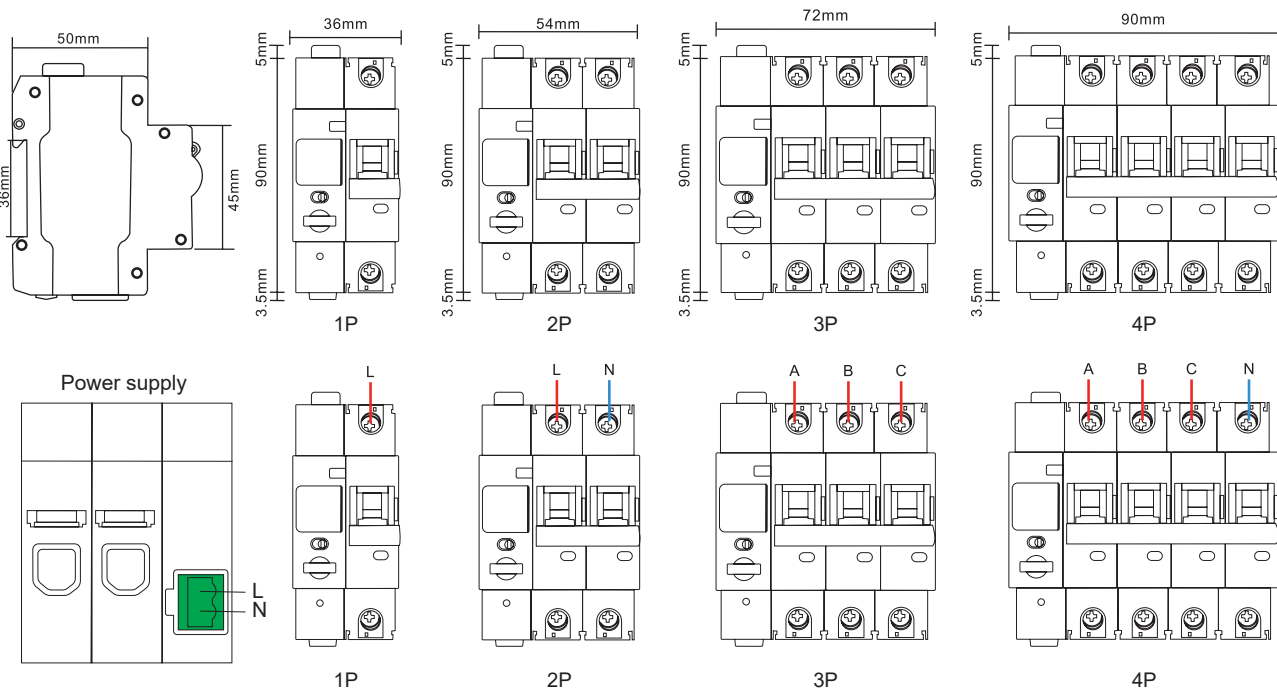

Instruction of Type Code


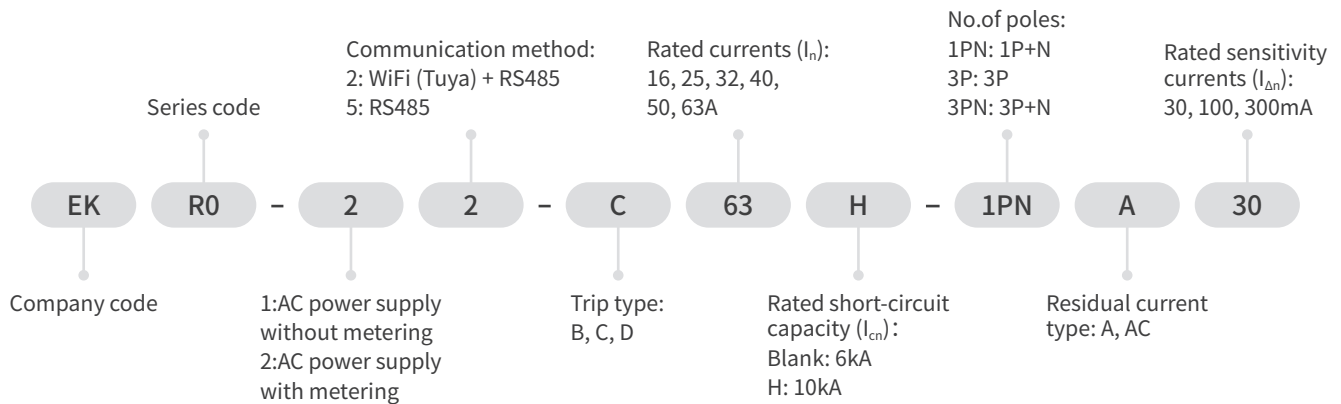



Technical Parameter

| | |
|--|---|
| Standard | IEC/EN 61009-1 |
| Residual current type | A, AC |
| No. of poles | 1P+N, 3P, 3P+N (with switched neutral) |
| Standby power consumption | < 5W |
| Status indicator | LED |
| Rated voltage (U _e) | 230/ 240V (1P+N), 400/415V (3P,3P+N) |
| Rated frequency | 50/60Hz |
| Rated currents (I _n) | 16, 25, 32, 40, 50, 63A |
| Rated sensitivity currents (I _{Δn}) | 10,30,100,300mA |
| Residual current off-time under (I _{Δn}) | ≤ 0.1S |
| Reted residual making and breaking capacity (I _{Δm}) | 500A (I _n ≤ 50A), 10I _n (I _n >50A) |
| Rated short-circuit capacity (I _{cn}) | 6kA, 10kA |
| Energy limiting class | 3 |
| Rated impulse withstand voltage (U _{imp}) (1.2/50μs) | 4kV |
| Dielectric test voltage | 2kV (50/60Hz, 1 min.) |
| Trip curve | B: (3-5) x I _n , C: (5-10) x I _n , D: (10-20) x I _n |
| Trip time | ≤ 0.1S |
| Electrical life | 4000 Cycles |
| Mechanical life | 10000 Cycles |
| Communication method | WiFi (Tuya), 2.4GHz; RS485, Baud rate: 2400/ 4800/ 9600 (default) |
| Operational safety | Mechanical padlock, Ensure safety during onsite maintenance |
| Monitoring physical data | Real-time voltage, Real-time current, Real-time power, Temperature, Switch state, Device operating status |
| Function description | Overload protection, Short circuit protection, Leakage protection, Over-temperature protection, Multiple timing, Remote control, Electricity metering |


| | |
|---|---|
| Characteristic set up | Over/under voltage action time, Over/under voltage value, Overcurrent value, Voltage imbalance value, Over power value, Phase loss value, Overtemperature value |
| Protection degree | IP20 |
| Ambient temperature | -25°C to +55°C (Current capacity is significantly reduced at 70°C) |
| Storage temperature | -25°C to +70°C |
| Terminal connection type | Cable/Pin-type busbar/Fork-type busbar |
| Max. conductor cross-sections for cable | 25mm ² |
| Altitude | ≤ 2000m |
| Installation | Mounting on 35mm DIN rail |
| Incoming method | From top |

Dimensions and Wiring Diagram

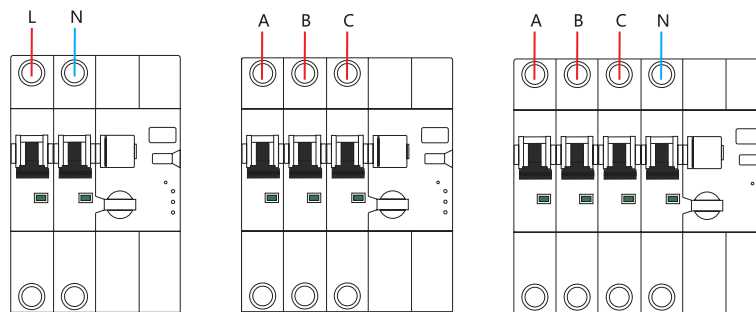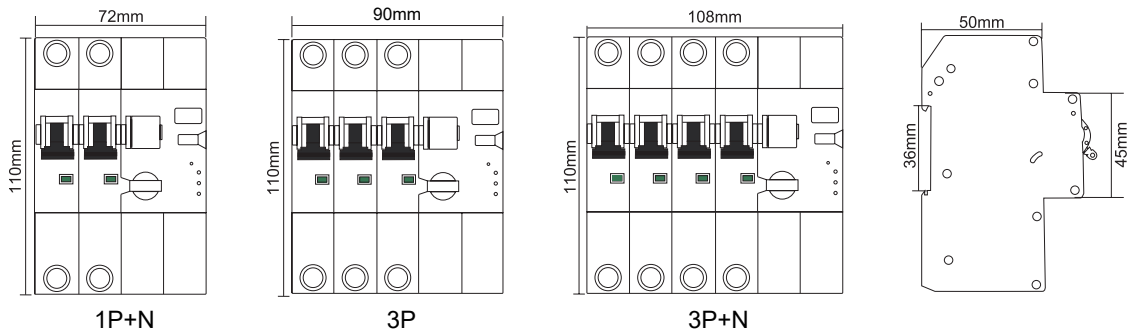

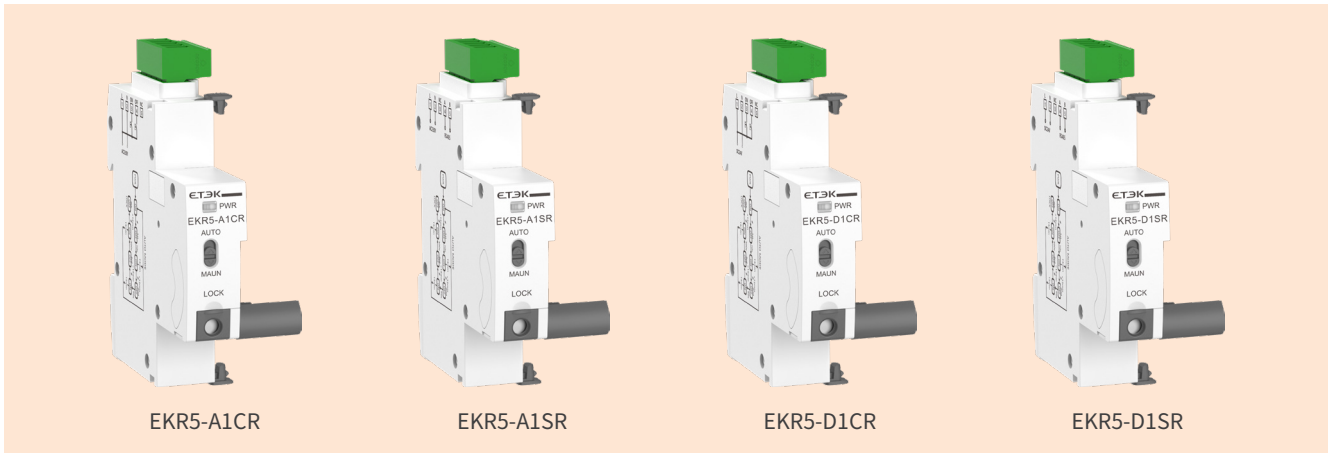

Overview

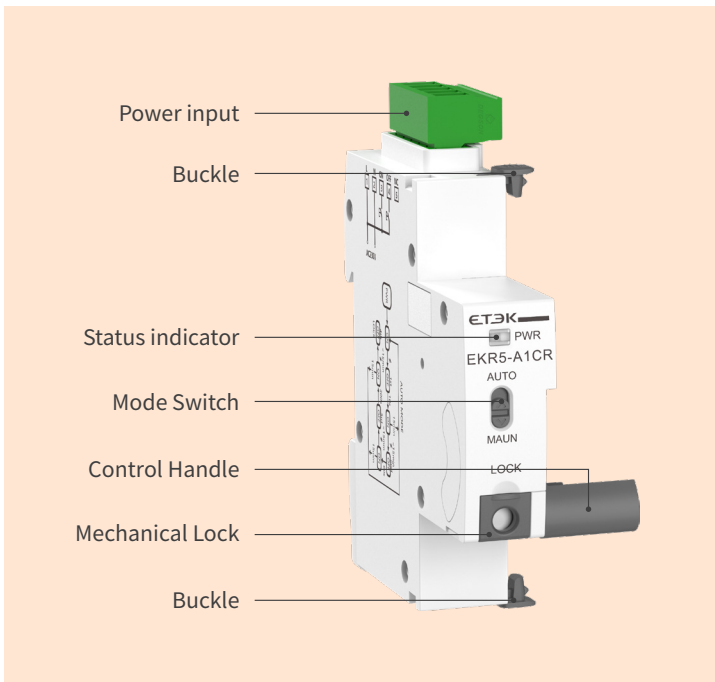

EKR5 Series Recloser is a reclosing device compatible with switch control and RS485 remote control, designed for use with RCCBs.

It features an automatic reclosing function that attempts to restart up to three times. If a line protection device trips due to manual opening, short circuit, leakage, or overload, the EKR5 will automatically attempt to restore power, enhancing the reliability of the power supply system.

This device is extensively used in areas such as home smart power distribution and photovoltaic equipment, making it a practical and widely adopted solution for reclosing needs.


Features

- Can be used with ETEK's RCCBs.
- Supports switch control or RS485 control of RCCB, remote closing and opening.
- Type R has automatic reclosing function (3 times).
- Includes manual/automatic selector switch.
- The working status is indicated by an LED.
- The operating mechanism is only 18mm wide.
- A padlock can be used to secure the circuit breaker in the open position, ensuring safe operation on site.

EKR5 Series

Recloser for RCCB

Instruction of Type code

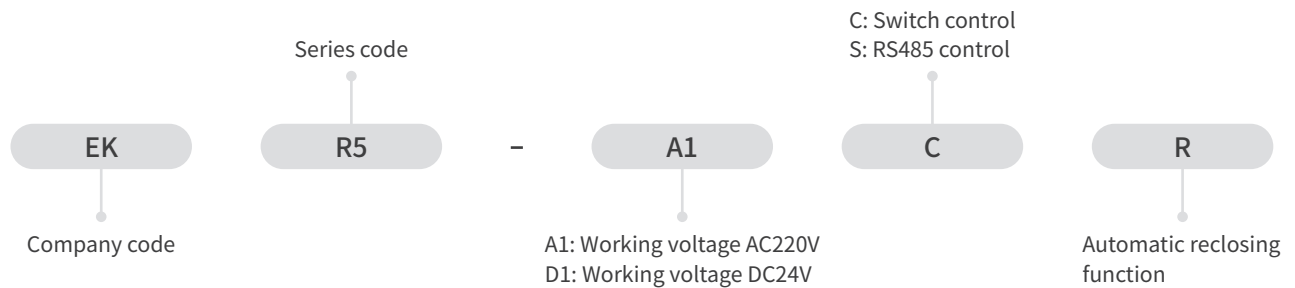


Technical Parameter


| Basics Model | | | | |
|-------------------------------------|---|---|---|---|
| Ref No. | EKR5-A1C | EKR5-D1C | EKR5-A1S | EKR5-D1S |
| Control mode | Switching input control | | RS485 control (MODBUS-RTU) | |
| Power terminals | A1-A2 | | | |
| Power supply voltage | AC230V±10% | DC24V±10% | AC230V±10% | DC24V±10% |
| Power consumption | AC max.1VA(standby) max.20VA(operation) | DC max.1VA(standby) max.20VA(operation) | AC max.1VA(standby) max.20VA(operation) | DC max.1VA(standby) max.20VA(operation) |
| Frequency range | 50Hz-60Hz | | | |
| Supply indication | Red and green LEDs | | | |
| Action time | ≤ 1s | | | |
| Electrical life | 4000 Cycles | | | |
| Mechanical life | 10000 Cycles | | | |
| Operating ambient temperature | -20°C to+55°C | | | |
| Storage temperature | -35°C to+75°C | | | |
| Installation | Mounting on 35mm DIN rail | | | |
| Protection degree | IP20 | | | |
| Overvoltage category | III | | | |
| Pollution degree | 2 | | | |
| Max. Supply terminal size for cable | 2.5mm ² | | | |
| Dimensions | 84×18×78mm | | | |
| Matching products | EKL6-100, EKL6-100B, EKL6-63EV | | | |

| Built-in automatic recloser | | | | |
|-------------------------------------|--|---|--|---|
| Ref No. | EKR5-A1CR | EKR5-D1CR | EKR5-A1SR | EKR5-D1SR |
| Control mode | Switching input control + automatic reclosing | | RS485 control (MODBUS-RTU) + automatic reclosing | |
| Power terminals | A1-A2 | | | |
| Power supply voltage | AC230V±10% | DC24V±10% | AC230V±10% | DC24V±10% |
| Power consumption | AC max.1VA(standby) max.20VA(operation) | DC max.1VA(standby) max.20VA(operation) | AC max.1VA(standby) max.20VA(operation) | DC max.1VA(standby) max.20VA(operation) |
| Frequency range | 50Hz-60Hz | | | |
| Supply indication | Red and green LEDs | | | |
| Action time | ≤ 1s | | | |
| Auto reclosing times | 3 | | | |
| Auto reclosing interval time | 10S - 60S - 300S | | | |
| Reset the closing times | No trip or manual reset within 15 minutes after the successful closing | | | |
| Electrical life | 4000 Cycles | | | |
| Mechanical life | 10000 Cycles | | | |
| Operating ambient temperature | -20°C to+55°C | | | |
| Storage temperature | -35°C to+75°C | | | |
| Installation | Mounting on 35mm DIN rail | | | |
| Protection degree | IP20 | | | |
| Overvoltage category | III | | | |
| Pollution degree | 2 | | | |
| Max. Supply terminal size for cable | 2.5mm ² | | | |
| Dimensions | 84×18×78mm | | | |
| Matching products | EKL6-100, EKL6-100B, EKL6-63EV | | | |


Wiring diagram




EKR5-A1C
EKR5-A1CR



EKR5-A1S
EKR5-A1SR



EKR5-D1C
EKR5-D1CR






EKR5-D1S
EKR5-D1SR

EKR5 Series





Recloser for RCCB

ETEK®

Adapt to the Main Parameters of RCCB

| | | | |
|--|---|--|---|
| |  |  |  |
| RCCB Ref No. | EKL6-100 | EKL6-100B | EKL6-63EV |
| Standard | IEC/EN61008-1 | IEC61008-1, IEC62423 | IEC61008-1, IEC62955 |
| Type of trip | Electro-magnetic | | |
| Residual current type | AC, A, A-G / A-SI, A-S | B | A+DC 6mA |
| No. of poles | 2P(1P+N), 4P(3P+N), N Pole on left | | |
| Rated voltage (U _e) | 1P+N: 230/240V~, 3P+N: 400/415V~ | | |
| Rated currents (I _n) | 16,25,32,40,63,80,100A | | 16,25,32,40,63A |
| Rated sensitivity currents (I _{Δn}) | 10,30,100,300mA (10mA only for I _n =16-25A) | 30,100,300mA | 30mA DC trip threshold(I _{Δdc})=6mA |
| Rated conditional short-circuit current (I _{nc}) | EKL6-100: 6kA EKL6-100H: 10kA | 10kA | 10kA |
| Electrical life | 2,000 Cycles | | |
| Mechanical life | 4,000 Cycles | | |
| Ambient temperature | -25°C to +40°C | | -25°C to +55°C |
| Ground fault indicator | Yes | | |
| Protection degree | IP20 | | |
| Terminal connection type | Cable/Pin-type busbar/Fork-type busbar | | |
| Max.terminal size for cable | 35mm ² | | |
| Max.tightening torque | 2.5N.m | | |
| Installation | Mounting on 35mm DIN rail | | |
| Incoming method | From top and bottom | | |

Dimension (mm)

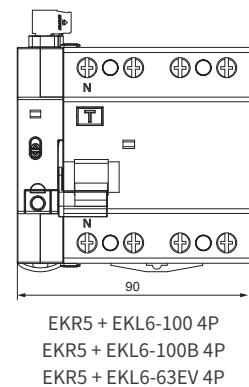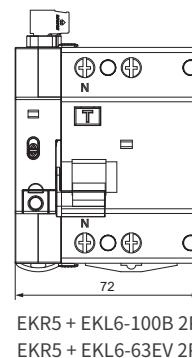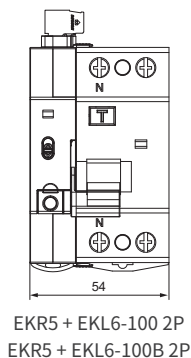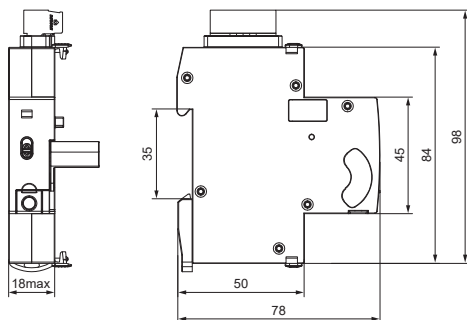



Overview

EKA1 Series Smart Protection Switch combines multiple circuit protection functions, including over-voltage, under-voltage, and over-current. It is designed for current working environments up to 63A and is available in two versions: one with Wi-Fi communication and one without. The Wi-Fi version allows for remote control of the switch status via smartphone and enables real-time monitoring of electrical parameters such as voltage, current, and power using the Tuya app. Users can also set the thresholds of the main electrical parameters through the front panel of the device or the smartphone app.

EKA1 Series Smart Switch is widely used in both home and industrial settings due to its easy installation and user-friendly operation and can be wired to any existing DB or distribution board.

Features

- **Integrated Protection:** Combines over-voltage, under-voltage, and over-current protection in one device.
- **High Current Capacity:** Suitable for environments with working currents up to 63A.
- **Remote Control:** Wi-Fi-enabled model allows for remote on/off control via smartphone.
- **Real-time Monitoring:** Uses the Tuya app to monitor voltage, current, and power in real-time.
- **Adjustable Parameters:** Thresholds for main electrical parameters can be set via the device's front panel or smartphone app.
- **Metering Function:** Provides accurate measurement of electrical parameters.
- **Timing Control:** Improve energy management efficiency, enhance power safety.

Technical Parameter


| Standard | | IEC 60947-5-1 | | | |
|--------------|-------------------------|-----------------------------|---------------------|---------------------|---------------------|
| Model | | EKA1-TW-E3 | EKA1-TW-E2S | EKA1-R-E2S | EKA1-R-V2 |
| Function | Overvoltage protection | ✓ | ✓ | ✓ | ✓ |
| | Undervoltage protection | ✓ | ✓ | ✓ | ✓ |
| | Overcurrent protection | ✓ | ✓ | ✓ | ✗ |
| | Metering function | ✓ | ✓ | ✓ | ✗ |
| | Screen off | No operation for 60 seconds | ✗ | ✗ | ✗ |
| Display type | | LCD | Double digital tube | Double digital tube | Single Digital tube |

EKA1 Series

Smart Relay Switch

| | | | | | |
|--|-----------------------------------|---------------------------------------|---|-----------------|---|
| Display data | Real-time voltage | ✓ | ✓ | ✓ | ✓ |
| | Real-time current | ✓ | ✓ | ✓ | ✗ |
| | Real-time power | ✓ | ✓ | ✓ | ✗ |
| | Switch state | ✓ | ✗ | ✗ | ✗ |
| | Network status | ✓ | ✓ | ✗ | ✗ |
| Power button | | Yes | | | |
| Power status indicator | | Yes | | | |
| Network button | | Up button (short press for 3 seconds) | | ✗ | ✗ |
| Communication method | | Wi-Fi (Tuya) | | Local operation | |
| Control type | | Remote, Manual | | Manual | |
| Poles | | 1P+N, N pole on the left | | | |
| Standby power consumption | | ≤ 1.5W | | | |
| Operating voltage range | | 90V~265V | | | |
| Rated frequency | | 50/60Hz | | | |
| Rated operating current | | 1-63A | | | |
| Voltage and current measuring accuracy | | Class 1.0 | | Class 2.0 | |
| Energy measurement accuracy | | Class 2.0 | | Class 2.0 | |
| Protection degree | | IP20 | | | |
| Ambient temperature | | -25°C to +70°C , Max. 95% humidity | | | |
| Terminal block protection | | Lead seal | | | |
| Setpoint | Over-voltage range | 230V~300V (default:280V) | | | |
| | Over-voltage recovery range | 225V~295V (default:275V) | | | |
| | Over-voltage tripping time | 5s~600s (default:60s) | | | |
| | Over-voltage recovery delay time | 5s~600s (default:60s) | | | |
| | Under-voltage range | 100V~210V (default:115V) | | | |
| | Under-voltage recovery range | 100V~215V (default:120V) | | | |
| | Under-voltage tripping time | 5s~600s (default:60s) | | | |
| | Under-voltage recovery delay time | 5s~600s (default:60s) | | | |
| | Over-current adjustable range | 1A-63A (default:63A) | | ✗ | |
| | Over-current tripping time | 5s~600s (default:60s) | | ✗ | |
| | Over-current recovery delay time | 5s~600s (default:60s) | | ✗ | |

Dimension (mm)

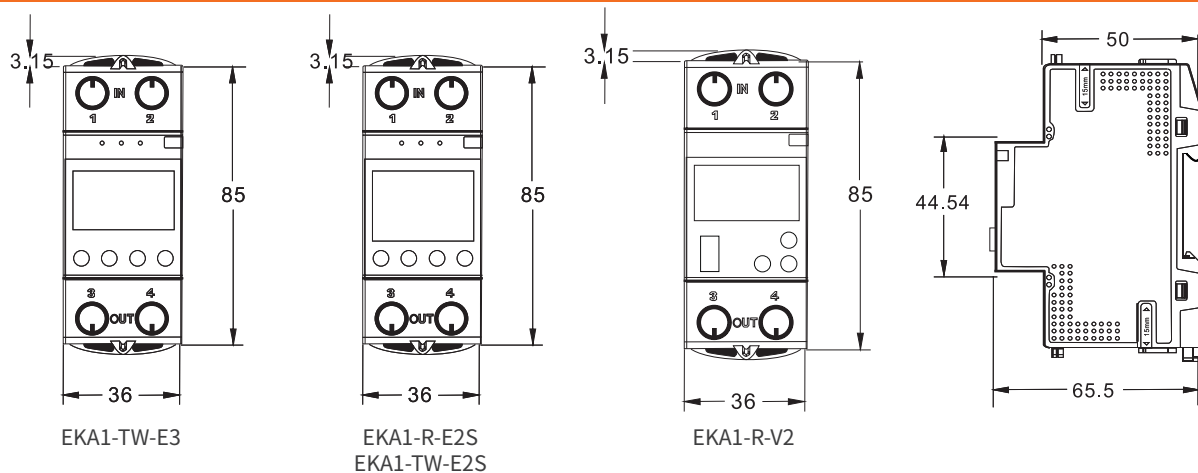



Overview

EKA3 Series Smart Protection Switch integrates multiple circuit protection functions such as over-voltage, under-voltage, over-current, etc., and is equipped with a timing function, designed for current working environments up to 63A. Users can remotely control the switch status, monitor electrical parameters such as voltage, current, power in real time, and set corresponding protection thresholds.

EKA3 is easy to install and operate and is widely used in homes and industrial places.

Features

- **Integrated Protection:** Combines over-voltage, under-voltage, and over-current protection in one device.
- **High Current Capacity:** Suitable for environments with working currents up to 63A.
- **Remote Control:** Allows remote on/off control via the Tuya app or RS485 platform.
- **Real-time Monitoring:** Uses the Tuya app or RS485 platform to monitor voltage, current, and power in real-time.
- **Adjustable Parameters:** Thresholds for main electrical parameters can be set Tuya app or RS485 platform.
- **Metering Function:** Provides accurate measurement of electrical parameters.
- **Timing Control:** Improve energy management efficiency, enhance power safety.

Technical Parameter


| Standard | | IEC 60947-5-1 | |
|--------------------------|-------------------------|---------------|--------|
| Model | | EKA3-TW | EKA3-M |
| Function | Overvoltage protection | ✓ | ✓ |
| | Undervoltage protection | ✓ | ✓ |
| | Overcurrent protection | ✓ | ✓ |
| | Metering function | ✓ | ✓ |
| Power status indicator | | Yes | |
| Network status indicator | | Yes | |
| Working Status Indicator | | Yes | |
| Power button | two-in-one button | Yes | |
| Network button | | Yes | |

EKA3 Series

Smart Relay Switch

| | | | |
|--|------------------------------------|--|--------------------------|
| Communication method | Wi-Fi (Tuya) | RS485 | |
| Control type | Remote, Manual | | |
| Poles | 1P+N, N Pole on the left | | |
| Standby power consumption | ≤ 1.5W | | |
| Operating voltage range | 90V~265V | | |
| Rated frequency | 50/60Hz | | |
| Rated operating current | 1-63A | | |
| Voltage and current measuring accuracy | Class 1.0 | | |
| Energy measurement accuracy | Class 2.0 | | |
| Protection degree | IP20 | | |
| Ambient temperature | -20°C to +70°C , Max. 95% humidity | | |
| Terminal block protection | Integrated cover | | |
| Setpoint | Over-voltage range | 230V~265V (default:265V) | 230V~300V (default:280V) |
| | Over-voltage recovery range | Automatic adjustment according to overvoltage protection value -5V | 225V~295V (default:275V) |
| | Over-voltage tripping time | - | 5s~600s (default:60s) |
| | Over-voltage recovery delay time | - | 5s~600s (default:60s) |
| | Under-voltage range | 140V~210V (default:160V) | 100V~210V (default:115V) |
| | Under-voltage recovery range | Automatic adjustment according to overvoltage protection value +5V | 100V~215V (default:120V) |
| | Under-voltage tripping time | - | 5s~600s (default:60s) |
| | Under-voltage recovery delay time | - | 5s~600s (default:60s) |
| | Over-current adjustable range | 1A-63A (default:63A) | 1A-63A (default:63A) |
| | Over-current tripping time | - | 5s~600s (default:5s) |

Dimension (mm)

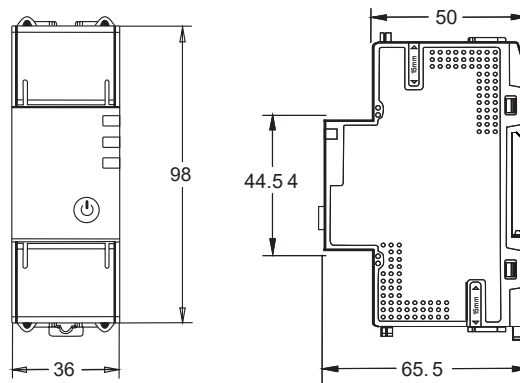



Overview

EKA5 is an 18mm width DIN rail mount smart switch that provides convenient and intelligent control of your appliances, protecting circuits with an operating current of up to 40A. Connect it to your home Wi-Fi network and control it remotely via the Tuya App. Integrated energy metering allows you to track power consumption, optimize energy usage, and save money on electricity bills.

EKA5 Multi-function Switch is ideal for a variety of applications, including home automation, industrial control, and energy management.

Features

- **Remote Control:** Manage your switch from anywhere using the Tuya or Smart Life app.
- **Timing Functions:** Set schedules, countdowns, and cycle timings for automated control.
- **Energy Metering:** Monitor power consumption statistics in real-time.
- **Adjustable Current Rating:** Customizable from 1A to 40A via the app.
- **Multiple Protection Features:** Includes over-current, under-voltage, and over/under-voltage protection.
- **Wide Voltage Range:** Operates from AC 90V to 265V.
- **Easy Installation:** Standard DIN rail mounting for quick setup.

Technical Parameter


| Standard | | IEC 60947-5-1 |
|--------------------------|-------------------------|---------------|
| Model | | EKA5-TW |
| Function | Overvoltage protection | ✓ |
| | Undervoltage protection | ✓ |
| | Overcurrent protection | ✓ |
| | Metering function | ✓ |
| Network status indicator | | Yes |
| Working Status Indicator | | Yes |
| Power button | two-in-one button | Yes |
| Network button | | Yes |


EKA5 Series

Smart Relay Switch with Metering

| | | |
|--|------------------------------------|--|
| Communication method | Wi-Fi (Tuya) | |
| Control type | Remote, Manual | |
| Poles | 1P+N, N Pole on the left | |
| Standby power consumption | ≤ 1.5W | |
| Operating voltage range | 90V~265V | |
| Rated frequency | 50/60Hz | |
| Rated operating current | 1-40A | |
| Voltage and current measuring accuracy | Class 1.0 | |
| Energy measurement accuracy | Class 2.0 | |
| Protection degree | IP20 | |
| Ambient temperature | -20°C to +70°C , Max. 95% humidity | |
| Connection | From top | |
| Setpoint | Over-voltage range | 230V~265V (default:265V) |
| | Over-voltage recovery range | Automatic adjustment according to overvoltage protection value -5V |
| | Under-voltage range | 140V~210V (default:160V) |
| | Under-voltage recovery range | Automatic adjustment according to overvoltage protection value +5V |
| | Over-current adjustable range | 1A-40A (default:40A) |

Dimension (mm)

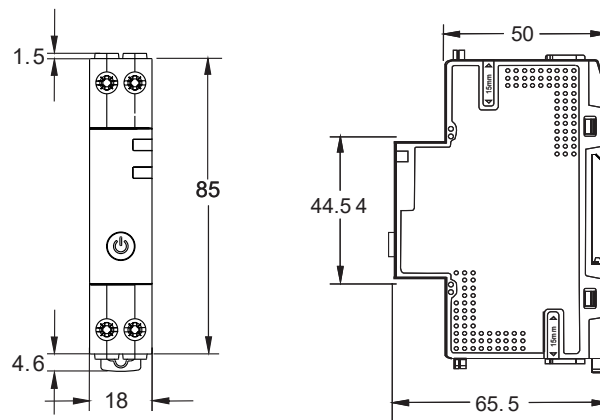

 The product data referred to in the company shall be subject to material object. Subject to change without notice.
The company has the final right to interpret.

 Green paper printing.

ETЭК®
ETEK ELECTRIC

ZHEJIANG ETEK ELECTRICAL TECHNOLOGY CO..LTD.

No.288 Wei 17th Road, Economic Development Zone, Yueqing City, Zhejiang China.

Tel: 0086-577-62718777 0086-577-62780116

Email: info@etek-china.com

Web: www.etek-china.com



WUHU ETEK ELECTRIC CO..LTD.

No.770 Wutun Fast Road, Anhui Xinwu Economic Development Zone, Wanzhi District,
Wuhu City, Anhui Province, P.R.China

Tel: 0086-553-8511789

Email: sales@etek-electric.com

Web: www.etek-electric.com

